WORLD NETWORK

Kubota Corporation

http://caststeel.kubota.co.jp/

Hirakata Plant

Material Manufacturing Dept. I, Hirakata Plant 1-1-1 Nakamiya Oike, Hirakata-Shi, Osaka, 573-8573, Japan

Tokyo Head Office Material Division 1-3, Kyobashi 2-Chome, Chuo-Ku, Tokyo, 104-8307, Japan Phone: +81-3-3245-3552, Fax: +81-3-3245-3591 E-mail: kbt_g.steel-casting_contacta1@kubota.com

Osaka Head Office Material Division

1-2-47, Shikitsu-Higashi, Naniwa-Ku, Osaka, 556-8601, Japan

Kubota Materials Canada Corporation

http://www.kubotamaterials.com/

Head Office and Plant 25 Commerce Road Orillia, Ontario L3V 6L6

Phone: +1-705-325-2781, Fax: +1-705-325-5887 (1-800-461-0260 in North America) E-mail: kmc_g.sales@kubota.com

Houston Office Phone: +1-281-232-9954 E-mail: aart.slikker@kubota.com

Europe & Eastern Canada Office Phone:+1-705-323-7774 E-mail: nellie.clark@kubota.com

Wesetrn USA & Canada Office Phone:+1-705-828-1910 E-mail: ken.decaire@kubota.com

Eastern USA & Central Canada Office Phone:+1-705-826-4519 E-mail: eric.hendriks@kubota.com

Technology to Improve Cracking Furnace Performance

©2023 KUBOTA Corporation 23.10.0.1 IN.PP



KUBOTA Corporation 1-2-47, Shikitsu-Higashi, Naniwa-Ku, Osaka, 556-8601, Japan http://www.kubota-global.net











Kubota has been supplying ethylene producers with high performance alloy since 1965. As alloy technology has progressed from HK through HP (35Ni/25Cr), and 45Ni/35Cr, Kubota has led the industry. Apart from alloy development, Kubota has also developed an innovative concept for cracking tubes which achieves lower tube metal temperatures and reduced coke formation compared to conventional tubes. Kubota has named this new technology MERT (Mixing Element Radiant Tube). MERT is a centrifugally cast tube in Kubota's high quality alloy with a spiral mixing element on the inside surface.

MERT—New Technology for Cracking Tube

"What Are Benefits of MERT" with MERT Advantages

In a straight run of smooth bare tube, laminar flow in the boundary layer acts to reduce heat transfer. This boundary layer effect promotes coking, increases firing rates and elevates tube temperature. MERT works by periodically breaking up the boundary layer, mixing the hot surface gases with the cooler turbulent flow at the core.




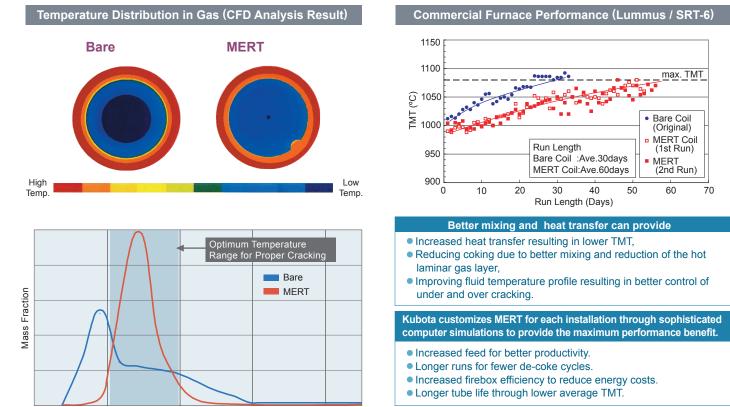

Outlet Gas Temperature

"Go To Next Stage" with MERT Advancement

Since 1996, when the first MERT was installed in a commercial ethylene furnace, there have been hundreds of MERT installations worldwide. MERT has proved to be effective and reliable resulting in many repeat customers. Some furnace designs are unable to benefit from MERT due to pressure drop limitations. To address this limitation, Kubota has developed the next generation of MERT, named "Slit-MERT." By using a discontinuous element, Slit-MERT maintains the established heat transfer benefits of MERT while reducing the pressure drop. Slit-MERT has successfully been installed in more than hundred (100) furnaces since commercialization in 2003.

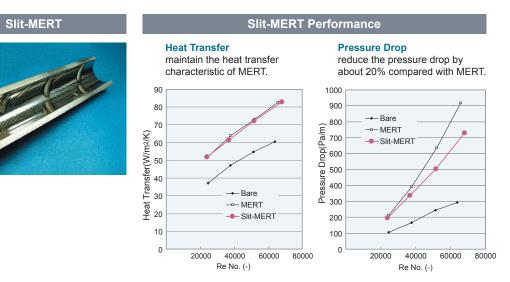

Furnace Type	No. of Installations		
	MERT	Slit-MERT	X-MERT
SRT-I&1.5	8	3	1
SRT-II	7	2	—
SRT-III	14	5	—
SRT-IV	2	13	1
SRT-V	73	96	45
SRT-VI	4	30	32
Millisecond	132	30	4
Score	4	80	2
U-coil	10	25	36
W-coil	12	3	1
Split-U	7	11	13
GK-5	_	4	1
GK-6	1	1	11
Other	44	21	20
Total	318	324	167

with a novel manufacturing process. X-MERT can reduce the pressure drop by further 10% over Slit-MERT by optimizing the geometry and frequency of the element. It is recommended to the customer whose furnace does not have enough room for pressure drop.

Commercial Furnace (1996~2022)

Total 809 Furnaces

Innovation on Slit-MERT "X-MERT" "X-MERT" has been developed as an innovation of Slit-MERT and commercialized since 2007 Slit-MERT X-MERT I. D. Temp (°C)



